

Three Phase Transformer


will be the company taking care of



Without the use of oil for insulation and cooling, the products are treated with the impregnation with varnish after manufacturing with heat-resistant materials. Our transformers have no risk of explosion and fire, and are easy to maintain due to their small appearance. The designs of our company's transformers are optimized according to the type of load equipment and its applications, thus our products are manufactured through order production.



Types	3 Φ , 3-1 Φ
Class of insulation	E, B, F, H class
Input voltage	0~6600V (order production)
Output voltage	0~6600V (order production)
Capacity	500VA~2MVA
Applications	For power supplying and operating
Features	<ul style="list-style-type: none"> - High efficiency, low noise - Three phase lottery type - Ensure reliability and safety

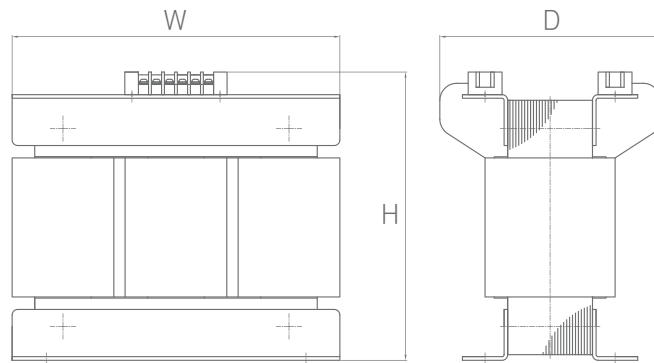

(unit : mm)

Product name	Specification	W	D	H
Three Phase Transformer	3P 1KVA 380V/220V Yd1	200	130	180
	3P 2KVA 380V/220V Yd1	250	180	240
	3P 3KVA 380V/220V Yd1	290	190	250
	3P 4KVA 380V/220V Yd1	340	220	300
	3P 10KVA 380V/220V Yd1	360	230	300
	3P 20KVA 380V/220V Yd1	450	280	400
	3P 30KVA 380V/220V Yd1	460	350	460
	3P 50KVA 380V/220V Yd1	520	410	520
	3P 50KVA 380V/220V Yd1	600	450	600
	3P 100KVA 380V/220V Yd1	700	450	600
	3P 200KVA 380V/220V Yd1	800	500	750
	3P 500KVA 380V/220V Yd1	1050	650	1000

* The above products are some of our products, and they can be changed according to customers' requests.