


## **REACTOR**

- HT series transformers are double coiled which result in reduced(lower) leakage flux.
- HT series trans are designed to have low leakage flux which reduce TV(moniter) flickering.
- · Reduces in-rush current.







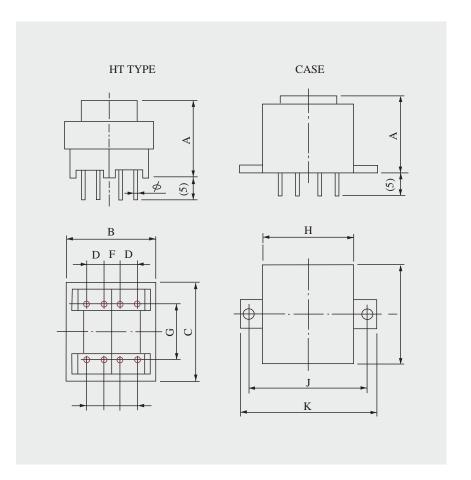

													111111
TYPE	Α	В	С	D	E	F	G	Н	1	J	K	Ø	PIN
HT-100	39.0	36.0	31.0	9.0	-	6.0	21.0	-	-	-	-	1.0	4×4
HT-150	40.0	42.0	35.0	5.5	-	7.0	25.0	45.0	38.0	54.0	66.0	1.0	6×6
HT-200	36.0	49.0	42.0	6.0	-	8.5	30.0	51.0	44.0	59.0	71.0	1.0	6×6
HT-100/200	39.0	36.0	31.0	9.0	-	6.0	21.0	-	-	-	-	1.0	$4\times4$
HT-150/200	40.0	42.0	35.0	5.5	-	7.0	25.0	45.0	38.0	54.0	66.0	1.0	6×6
HT-200/200	36.0	49.0	42.0	6.0	-	8.5	30.0	51.0	44.0	59.0	71.0	1.0	6×6