


Applications

Refrigerators, Show Cases(cold storage, freezing, thermal insulation), Ice Maker, etc


Function & Features

- Temperature automatic control for removing frost and for protecting the frozen rupture in the cold storage or freezing systems
- Easy to install at the small or narrow space as slim shape
- Small size with high contacting capacitance
- Available waterproof and dustproof types with welding vinyl tube on the part

SHAPE : A - 3 WIRE(TEMPERATURE FUSE)

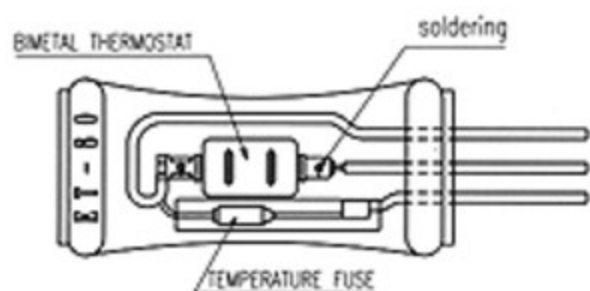

SHAPE : B - 2 WIRE

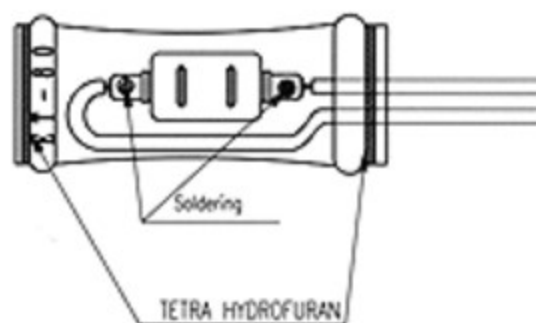

Safety Certificates

UL File No. E126365

CSA File No. 085546

VDE File No. 132011

Specification

Rated Current	AC 125V/15VA, 250V/7.5A
Temperature Range	-20°C ro 150°C
Reset_Temperature	
On/Off Differential	Min. 10°C, Mornal 15 to 25°C
Temp. Tolerance	Operating or Reset Temp.±3°C Min.(standard ±5°C)
Life Cycle	100,000 cycle Min.at rated
Dielectric Withstand	AC 1.8kV for 1 second
Insulation Resistance	100MΩ Min.
Internal Resistance	100mΩ Max.