

# Copper Covered Steel Wire for Cables



**+ Application** Special conductors of cable wires having electric and physical properties defined by International Standard such as ASTM, BS.

**+ 용도** 국제규격(ASTM, BS)에 따른 전기적, 물리적 특성을 갖춘 케이블용 도체.


## Wire Specification

Application		Telecommunication*	Electricity	Harness
Item				
Diameter(mm)		0.5~2.59	1.0~4.1	0.1~1.0
Tensile Strength (kgf/mm <sup>2</sup> )	Soft	35~45	Min. 35	Min. 35
	Hard	87~100		
	Extra Hard	Min. 110	-	-
Conductivity(%)		18~53	18~53	18~53
International Standard		ASTM B-227 B-452 B-869 B-910 BS 4087	ASTM B-217 B-910	ASTM B-227 B-452 B-910

※ Telecommunication applications have Drop wire, Coaxial, Detonator and Ground tracer cables.

※ Any specification except the above is negotiable.

## Packing

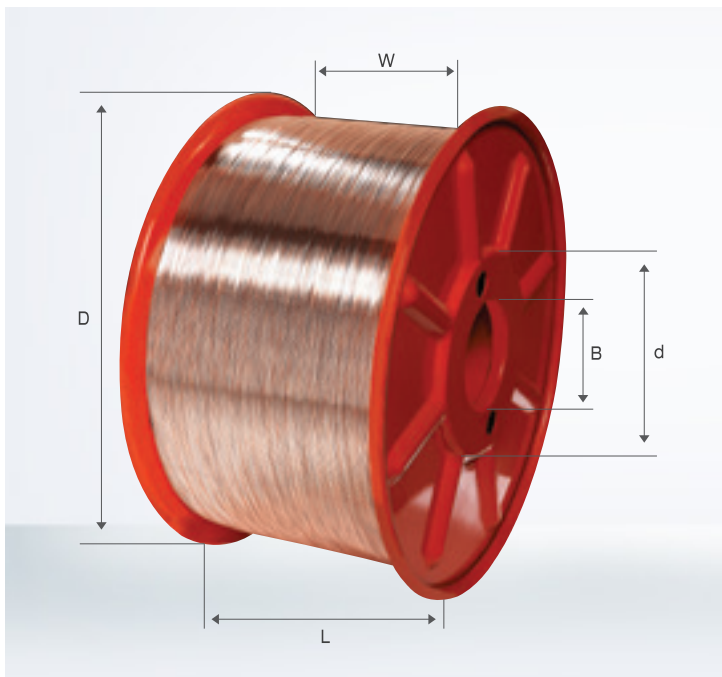

Bobbin Type	Dimension (mm)					Packing Weight (kg)
	D	d	B	W	L	
800kg Steel	750	320	130	500	520	800
500kg Steel	580	267	130	450	474	500
300kg Steel	580	265	130	306	320	300

※ Any packing requirement except the above is negotiable.