

INDUCTORS

FOR POWER LINE SMD

SPI-06032SRN--SERIES

FEATURES

1. High current capacity and Low DCR
2. High heat resistance, ideal for reflow soldering
3. High reliability



APPLICATIONS

1. Portable telephone, Personal Computer
2. Hard Disk drives, and other electronic equipment

ELECTRICAL CHARACTERISTICS



Part Number	L ±20% (uH)	DCR(Ω) MAX	Current(A)
SPI-06032SRN-100	10	0.14	1.00
120	12	0.16	0.94
150	15	0.18	0.86
180	18	0.25	0.78
220	22	0.32	0.76
270	27	0.36	0.64
330	33	0.41	0.61
390	39	0.47	0.53
470	47	0.51	0.50
560	56	0.72	0.46
680	68	0.82	0.42

Note1. Measurement frequency of Inductance value : 1KHz

Note2. Measurement ambient temperature of L, DCR and IDC : at 25°C

Note3. IDC : This indicates the value of current when the inductances is 20% lower than its initial value at D.C. superimposition or D.C. current when at Δt=40°C,which is lower.(Ta=20°C)

DIMENSIONS(Unit:mm)

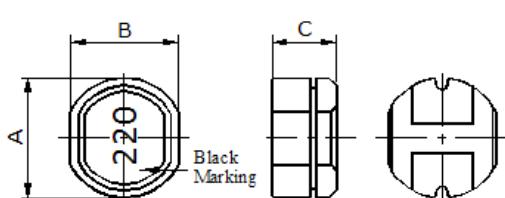

A	B	C	E	d2	F
6.5±0.40	5.5±0.40	3.2±0.40	6.00	1.70	5.50